


SPECIFICATIONS		
	Standard	Options
Frequency Range	1.00 to 125.00Mhz	
Package Size	7 x 5 x 1.6 +/-0.2 (mm)	7 x 5 x 1.3 +/-0.2 (mm)
Storage Temp. Range	-55 to 125C	
Operating Temp. Voltage	0 to +70C	-40 to +85C
Input Voltage	5VDC +/-10%	3.3VDC +/-10%
Maximum Input Current	25 to 85mA	
Logic "1" / "0"	90% Vdd Min./10% Vdd Max	
Output Symmetry	45/55% @ 1/2 Vp-p	
Output Rise and Fall Time	10nsec	
Pin 1 Tri-state	No Connection	Enable Output

Features:

- 5.0VDC Operation
- HCMOS/TTL Output
- Tri-State Enable/Disable

Pin Connections:

- #1 NC or E/D □ #3 Output
- #2 GND □ #4 V_{DD}

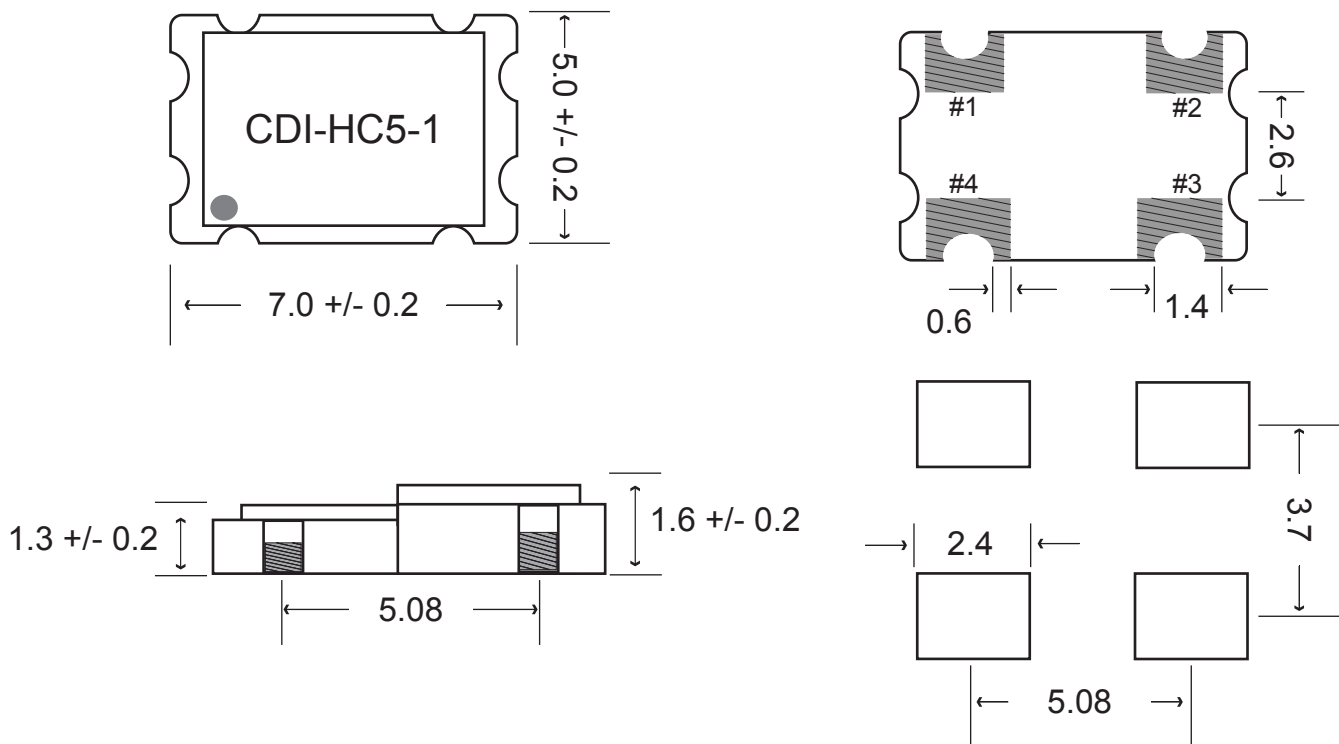

CDI Part Number Guide

CDI-HC5	1	A	0		18M0000
CDI Prefix	Sply Voltage	Temperature Range	Tol/Stab	Tri-State Enabled	Frequency
	1 = 5VDC 2 = 3.3VDC	A = 0~+70 C B = -20~+70 C C = -40~+85 C	0 = +/-100ppm 1 = +/-50ppm 2 = +/-25ppm	E	